



H058HM21000E0

5.7" Sonni STD - Extended Temperature Range - LED with 700 cd - Cooling Kit & Thermal Management


Model	H058HM21000E0	
Aspect Ratio	4:3	
Structure	Metal-cased Open Frame	
LCD Type	5,7 " Active matrix TFT-LCD	
Active Area	115,2 (H) x 86,4 (V)	
Monitor Dimensions	Width: 179 Height: 125 Depth: 36,5	
Max. Resolution	640 x 3 (H) x 480 (V)	
Pixel pitch (mm)	0.18 (per one triad) x 0.18	
Display Color	262K	
Brightness	700cd/m2	
Response Time(Typ.)	8ms	
Viewing Angle (Typ.at CR> 10)	Horizontal(left/right)	80°/80°
	Vertical(up/down)	70°/70°
Contrast Ratio(Typ.)	800:1	
Video Input	VGA Input only	
Video Signal Input	Mini D-Sub 15-pin VGA	
Power Supply	Type: External brick Input: 100-240 VAC, 50-60 Hz Output: 12 volts	
Environment	Operating Temp.	-30~85°C
	Storage Temp.	-30~85°C
	Operating RH:	5%~95%
	Storage RH:	5%~95%
MTBF	50.000 Hours	
LCD Back light Life(Typ.)	50.000 Hours	
OSD Control	Buttons	on/off, up, down, left, right
	Function	Contrast, brightness, Phase, Clock, Color,
Regular Warranty	1 year for controller; 1 year for	
Mount Interface	VESA standard 75mm and	
Certification	CE	

Options

- Our monitors are also available with different brightness (LED, viewing angle and operation & storage temperature range). Please ask for specific model.
- Optional Touch solutions:
 - Zytronic Projected Capacitive TouchScreen ZybridX that allows you to have a front Sacrificial Glass, protecting your TouchScreen & Monitor, up to 10 mm thickness.
- Optional Transflective TT enhancement


Ordering Information

- H058HM21000E0 Basic Product
- H058TM21000EC Basic Product with Transflective enhancement
- H058HM21X00E0 Basic Product with TouchScreen ZybridX
- H058TM21X00E0 Basic Product with Transflective enhancement and TouchScreen ZybridX

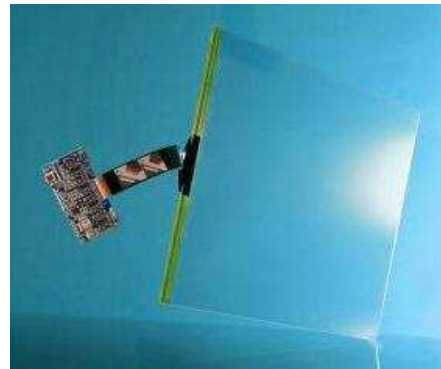

ZybridX TouchScreen & Controller (USB or RS232)

Front View

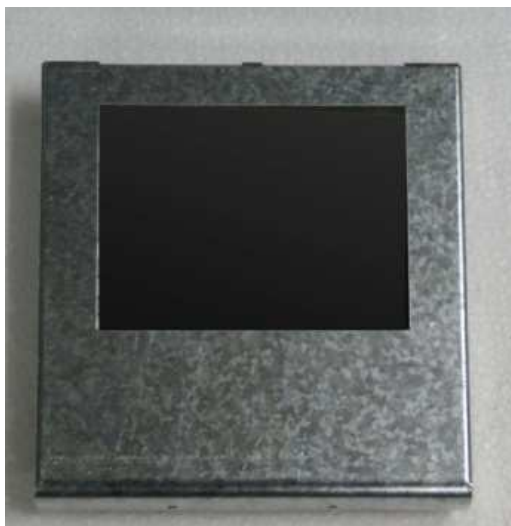

Back View

