



HO1002B1000EC

12.1" Sonni Open Frame STD Extended Temperature Range – Kit de Refrigeración

Model	HO1002B1000EC	
Aspect Ratio	4:3	
Structure	Metal-cased Open Frame	
LCD Type	12,1 " Active matrix TFT-LCD	
Active Area	12 " 246.0 x 184.5 mm	
Monitor Dimensions	Width: 223,5 Height: 300,5 Depth: 37	
Max. Resolution	800 x 600	
Pixel pitch (mm)	0.3075(H)mm*0.3075(V)mm	
Display Color	16.2M	
Brightness	400cd/m2	
Response Time(Typ.)	10ms	
Viewing Angle (Typ.at CR> 10)	Horizontal(left/right)	65°/65°
	Vertical(up/down)	50°/60°
Contrast Ratio(Typ.)	500:1	
Video Input	VGA Input only	
Video Signal Input	Mini D-Sub 15-pin VGA	
Power Supply	Type: External brick Input: 100-240 VAC, 50-60 Hz Output: 12 volts	
Environment	Operating Temp.	0~70°C
	Storage Temp.	-30~80°C
	Operating RH:	10%~90%
	Storage RH:	10%~90%
MTBF	50.000 Hours	
LCD Back light Life(Typ.)	50.000 Hours	
OSD Control	Buttons	on/off, up, down, left, right
	Function	Contrast, brightness, Phase, Clock, Color,
Regular Warranty	1 year for controller; 1 year for	
Mount Interface	VESA standard 75mm and	
Certification		

Options

•Our monitors are also available with different brightness (LED, viewing angle and operation & storage temperature range). Please ask for specific model.

•Optional Touch solutions:

•Zytronic Projected Capacitive TouchScreen ZybridX that allows you to have a front Sacrificial Glass, protecting your TouchScreen & Monitor, up to 10 mm thickness.

•Optional Transflective TT enhancement


Ordering Information

• HO1002B1000EC Basic Product

• HO10T2B1000EC Basic Product with Transflective enhancement

• HO1002B1X00EC Basic Product with TouchScreen ZybridX

• HO10T2B1X00EC Basic Product with Transflective enhancement and TouchScreen ZybridX

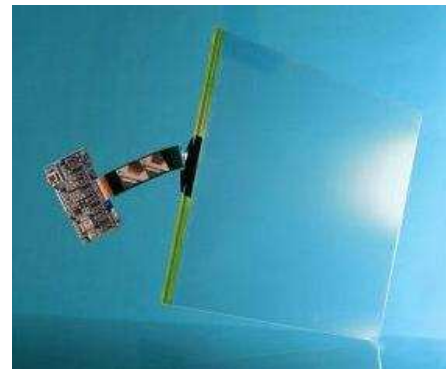

ZybridX TouchScreen & Controller (USB or RS232)

Front View



Back View

