



HO1102E1000E0

12.1" Sonni Open Frame STD – with Brackets

Model	HO1102E1000E0	
Aspect Ratio	4:3	
Structure	Metal-cased Open Frame	
LCD Type	12.1" Active matrix TFT-LCD	
Active Area	12 " 246.0(H) x 184.5(V)	
Monitor Dimensions	Width: 223,5 Height: 298,5 Depth: 37	
Max. Resolution	800 x 600	
Pixel pitch (mm)	0.3075(H)mm*0.3075(V)mm	
Display Color	16.2M	
Brightness	400cd/m2	
Response Time(Typ.)	10ms	
Viewing Angle (Typ.at CR> 10)	Horizontal(left/right)	80°/80°
	Vertical(up/down)	50°/60°
Contrast Ratio(Typ.)	600:1	
Video Input	VGA Input only	
Video Signal Input	Mini D-Sub 15-pin VGA	
Power Supply	Type: External brick Input: 100-240 VAC, 50-60 Hz Output: 12 volts	
Environment	Operating Temp.	-30~85°C
	Storage Temp.	-30~85°C
	Operating RH:	8%~95%
	Storage RH:	5%~95%
MTBF	50.000 Hours	
LCD Back light	50.000 Hours	
OSD Control	Buttons	on/off, up, down, left, right
	Function	Contrast, brightness, Phase, Clock, Color,
Regular Warranty	1 year for controller; 1 year for	
Mount Interface	VESA standard 75mm and	
Certification	CE	

Options

•Our monitors are also available with different brightness (LED, viewing angle and operation & storage temperature range). Please ask for specific model.

•Optional Touch solutions:

•Zytronic Projected Capacitive TouchScreen ZybridX that allows you to have a front Sacrificial Glass, protecting your TouchScreen & Monitor, up to 10 mm thickness. (Zytronic Certified and Approved Integrators)

•Optional Transflective TT enhancement


Ordering Information

• HO1102E1000E0 Basic Product

• HO11T2E1000E0 Basic Product with Transflective enhancement


• HO1102E1X00E0 Basic Product with TouchScreen ZybridX (Zytronic Certified and Approved Integrators)

• HO11T2E1X00E0 Basic Product with Transflective enhancement and TouchScreen ZybridX (Zytronic Certified and Approved Integrators)

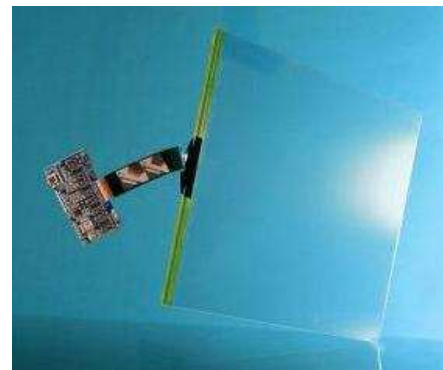

ZybridX TouchScreen & Controller (USB or RS232)

Front View

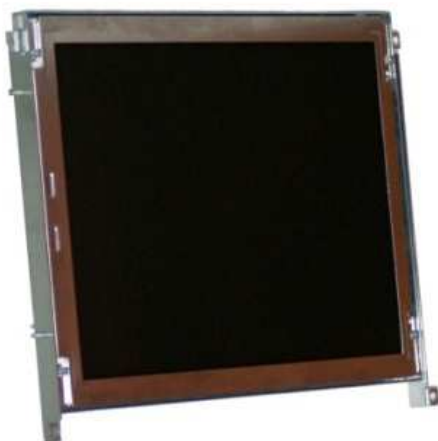

Back View

