



HO2205Y1000EK

15.1" Sonni Open Frame SMD

Model	HO2205Y1000EK	
Aspect Ratio	4:3	
Structure	Metal-cased Open Frame	
LCD Type	15 " Active matrix TFT-LCD	
Active Area	15 " 304,128 x 228,096	
Monitor Dimensions	Width: Height: Depth:	
Max. Resolution	1024 x 768	
Pixel pitch (mm)	0.297(H)mm*0.297(V)mm	
Display Color	16.2M	
Brightness	250 cd/m2	
Response Time(Typ.)	8ms	
Viewing Angle (Typ.at CR>10)	Horizontal(left/right)	80°/80°
	Vertical(up/down)	70°/60°
Contrast Ratio(Typ.)	700:1	
Video Input	VGA Input only	
Video Signal Input	Mini D-Sub 15-pin VGA	
Power Supply	Type: External brick Input: 100-240 VAC, 50-60 Hz Output: 12 volts	
Environment	Operating Temp.	0~65°C
	Storage Temp.	-20~65°C
	Operating RH:	5%~90%
	Storage RH:	5%~90%
MTBF	50.000 Hours	
LCD Back light Life(Typ.)	50.000 Hours	
OSD Control	Buttons	on/off, up, down, left, right
	Function	Contrast, brightness, Phase, Clock, Color,
Regular Warranty	1 year for controller; 1 year for	
Mount Interface	VESA standard 75mm and	
Certification	CE	

Options

•Our monitors are also available with different brightness (LED, viewing angle and operation & storage temperature range). Please ask for specific model.


•Optional Touch solutions:

•Zytronic Projected Capacitive TouchScreen ZybridX that allows you to have a front Sacrificial Glass, protecting your TouchScreen & Monitor, up to 10 mm thickness.

•Optional Transflective TT enhancement

Ordering Information

- HO2205Y1000EK Basic Product
- HO22T5Y1000EK Basic Product with Transflective enhancement
- HO2205Y1X00EK Basic Product with TouchScreen ZybridX
- HO22T5Y1X00EK Basic Product with Transflective enhancement and TouchScreen ZybridX
- HO2205Y1S00EK Basic Product with TouchScreen SAW
- HO2205Y1X04EK Basic Product with TouchScreen ZybridX and 4MM Sacrificial Glass

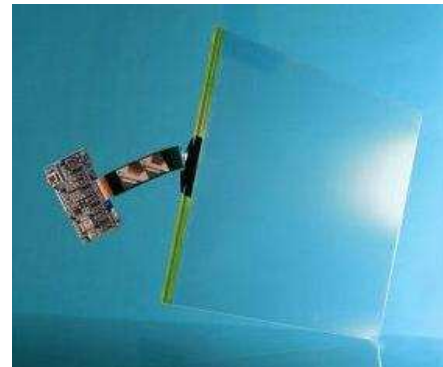

ZybridX TouchScreen & Controller (USB or RS232)

Front View



Back View

