



## HO66H7S1000EK

## Our Thin Monitor

17" New Moni Smart SMD – High Brightness - LEDS 1000 cd

<b>Model</b>	HO66H7S1000EK	
<b>Aspect Ratio</b>	5:4	
<b>Structure</b>	Metal-cased Open Frame	
<b>LCD Type</b>	17" Active matrix TFT-LCD	
<b>Active Area</b>	337.920(H) × 270.336(V)	
<b>Monitor Dimensions</b>	<b>Width:</b> 361 <b>Height:</b> 297 <b>Depth:</b> 23	
<b>Max. Resolution</b>	1280 × 1024	
<b>Pixel pitch (mm)</b>	0.264(H)mm*0.264(V)mm	
<b>Display Color</b>	16.7M	
<b>Brightness</b>	1000cd/m2	
<b>Response Time(Typ.)</b>	5ms	
<b>Viewing Angle (Typ.at CR&gt;10)</b>	Horizontal(left/right)	85°/85°
	Vertical(up/down)	80°/80°
<b>Contrast Ratio(Typ.)</b>	1000:1	
<b>Video Input</b>	VGA Input only	
<b>Video Signal Input</b>	Mini D-Sub 15-pin VGA	
<b>Power Supply</b>	Type: External brick Input: 100-240 VAC, 50-60 Hz Output: 12 volts	
<b>Environment</b>	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C
	Operating RH:	5%~90%
	Storage RH:	5%~90%
<b>MTBF</b>	50.000 Hours	
<b>LCD Back light Life(Typ.)</b>	50.000 Hours	
<b>OSD Control</b>	Buttons	on/off, up, down, left, right
	Function	Contrast, brightness, Phase, Clock, Color,
<b>Regular Warranty</b>	1 year for controller; 1 year for	
<b>Mount Interface</b>	VESA standard 75mm and	
<b>Certification</b>	CE	

### Options

•Our monitors are also available with different brightness (LED, viewing angle and operation & storage temperature range). Please ask for specific model.


•Optional Touch solutions:

•Zytronic Projected Capacitive TouchScreen ZybridX that allows you to have a front Sacrificial Glass, protecting your TouchScreen & Monitor, up to 10 mm thickness.

•Optional Transflective TT enhancement

### Ordering Information

- HO66H7S1000EK Basic Product
- HO66B7S1000EK Basic Product with Transflective enhancement
- HO66H7S1X00EK Basic Product with TouchScreen ZybridX
- HO66B7S1X00EK Basic Product with Transflective enhancement and TouchScreen ZybridX

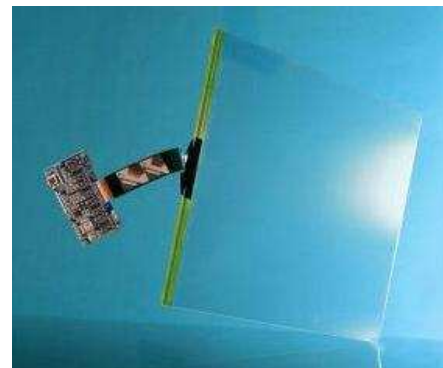

Zybrid XY TouchScreen & Controller  
(USB or RS232)

Front View



Back View

