



HO70H7X1000E0

17" Sonni STD - Open Frame TFT/LCD Monitor – LED High Brightness 1000 cd

Model	HO70H7X1000E0	
Aspect Ratio	5:4	
Structure	Metal-cased Open Frame	
LCD Type	17" Active matrix TFT-LCD	
Active Area	337.920(H) × 270.336(V)	
Monitor Dimensions	Width: 371 Height: 299 Depth: 40	
Max. Resolution	1280 × 1024	
Pixel pitch (mm)	0.264(H)mm*0.264(V)mm	
Display Color	16.7M	
Brightness	1000cd/m2	
Response Time(Typ.)	5ms	
Viewing Angle (Typ.at CR> 10)	Horizontal(left/right)	85°/85°
	Vertical(up/down)	80°/80°
Contrast Ratio(Typ.)	600:1	
Video Input	VGA Input only	
Video Signal Input	Mini D-Sub 15-pin VGA	
Power Supply	Type: External brick Input: 100-240 VAC, 50-60 Hz Output: 12 volts	
Environment	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C
	Operating RH:	5%~90%
	Storage RH:	5%~90%
MTBF	50.000 Hours	
LCD Back light Life(Typ.)	50.000 Hours	
OSD Control	Buttons	on/off, up, down, left, right
	Function	Contrast, brightness, Phase, Clock, Color,
Regular Warranty	1 year for controller; 1 year for	
Mount Interface	VESA standard 75mm and	
Certification	CE	

Options

•Our monitors are also available with different brightness (LED, viewing angle and operation & storage temperature range). Please ask for specific model.

•Optional Touch solutions:

•Zytronic Projected Capacitive TouchScreen ZybridX that allows you to have a front Sacrificial Glass, protecting your TouchScreen & Monitor, up to 10 mm thickness.

•Optional Transflective TT enhancement


Ordering Information

• HO70H7X1000E0 Basic Product

• HO70B7X1000E0 Basic Product with Transflective enhancement

• HO70H7X1X00E0 Basic Product with TouchScreen ZybridX

• HO70B7X1X00E0 Basic Product with Transflective enhancement and TouchScreen ZybridX

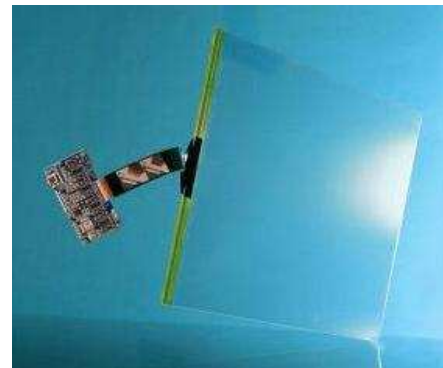

Zybrid XY TouchScreen & Controller
(USB or RS232)

Front View



Back View

