



HO72H9V1000E0

19" Sonni STD - Open Frame TFT/LCD Monitor – High Brightness LEDS

Model	HO72H9V1000E0	
Aspect Ratio	5:4	
Structure	Metal-cased Open Frame	
LCD Type	19" TFT LEDS Backlight	
Active Area	376.32 (H) x 301.06 (V)	
Monitor Dimensions	Width: 409 MM Height: 322,2 MM Depth: 59 MM	
Max. Resolution	1280 x 3(RGB) x 1024	
Pixel pitch (mm)	0.294 (per one triad) x 0.294	
Display Color	16.7M	
Brightness	1000cd/m2	
Response Time(Typ.)	5ms	
Viewing Angle (Typ.at CR>10)	Horizontal(left/right)	80°/80°
	Vertical(up/down)	80°/80°
Contrast Ratio(Typ.)	1000:1	
Video Input	VGA Input only	
Video Signal Input	Mini D-Sub 15-pin VGA	
Power Supply	Type: External brick Input: 100-240 VAC, 50-60 Hz Output: 12 volts	
Environment	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C
	Operating RH:	5%~90%
	Storage RH:	5%~90%
MTBF	70.000 Hours	
LED Back light Life(Typ.)	70.000 Hours	
OSD Control	Buttons	on/off, up, down, left, right
	Function	Contrast, brightness, Phase, Clock, Color,
Regular Warranty	1 year for controller; 1 year for	
Mount Interface	VESA standard 75mm and	
Certification	CE	

Options

•Our monitors are also available with different brightness (LED, viewing angle and operation & storage temperature range). Please ask for specific model.

•Optional Touch solutions:

•Zytronic Projected Capacitive TouchScreen ZybridX that allows you to have a front Sacrificial Glass, protecting your TouchScreen & Monitor, up to 10 mm thickness.

•Optional Transflective TT enhancement

Ordering Information

• HO72H9V1000E0 Basic Product


• HO72B9V1000E0 Basic Product with Transflective enhancement

• HO72H9V1X00E0 Basic Product with TouchScreen ZybridX

• HO72H9V1M00E0 Basic Product with TouchScreen 3M

• HO72B9V1X00E0 Basic Product with Transflective enhancement and TouchScreen ZybridX

• HO72B9V1M00E0 Basic Product with Transflective enhancement and TouchScreen 3M

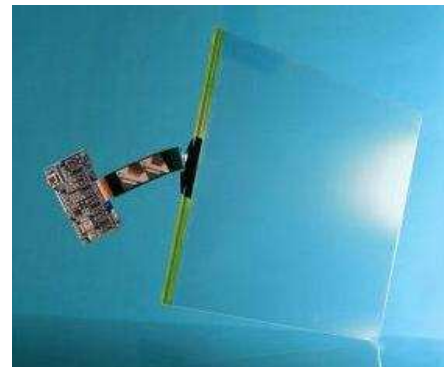

ZybridX TouchScreen & Controller (USB or RS232)

Front View



Back View



Mechanical Dimensions

