



HOA4HNE10DIE0

42" High brightness open frame LCD monitor with auto-dimming

Features

- High brightness with auto-dimming control (energy saving)
- For semi-outdoor kiosk, vending machine, signage application
- 42" 16:9 WUXGA TFT LCD display
- Removable environment light sensor
- RS232 for remote control
- Option with anti-reflective treatment



Specifications

LCD panel	Size	42"W (16:9)
	Backlight	LED
	Panel type	MVA
	Pixel pitch	0.4845 mm
	Active area	930.24x523.26 mm
	Brightness*	1000 cd/m2 (max.)
	Contrast	4000 : 1 (typical)
	Viewing angle	176/176 degree
	Resolution	1920 x 1080
	Display color	16.7M (8 bit)
	Response time	Gray-gray=6.5 mS
	Video	Hor. frequency
Ver. frequency		60/70 Hz
Pixel rate		165 MHz

* Higher brightness is on demand.

Signal input	VGA	
OSD adjustment	Power, Enter, Left, Right, Auto	
Power	DC input connector	4P power Din
	DC input	24Vdc/4.5A
	Consumption	110W
	Management	VESA DPMS
Mounting	200x200, 400x200mm VESA mount	
Dimension	999 (W) x 587.2 (H) x 122.7 (D) mm	
Net weight	TBD	
Package	Packing	1 pcs / carton
	Carton size	TBD
	Container loading	
Temperature	Operation	0 ~ 50 degree C
	Storage	-30 ~ 70 degree C


Ordering information

Model selection

	X: Panel selection	Y: Input selection	Z: Touch selection
	0: Standard, chosen	0: Standard, VGA/DVI	0: Standard, none
	A: Specified LCD	V: VGA only	G: Glass
	B: Specified LCD	H: VGA/DVI/HDMI	I: IR
	Specified LCD	P: DVI/HDMI/DP	P: Projective capacitive
	... etc.	S: VGA/DVI/S-video	


Optional accessories

- * Power adapter 100-240Vac I/P 24Vdc 6A O/P
- * Signal cable 1.8M VGA cable, 1.8M DVI cable

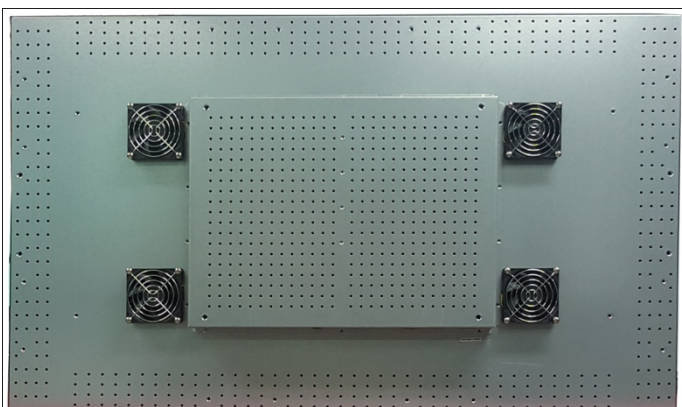



Product drawing

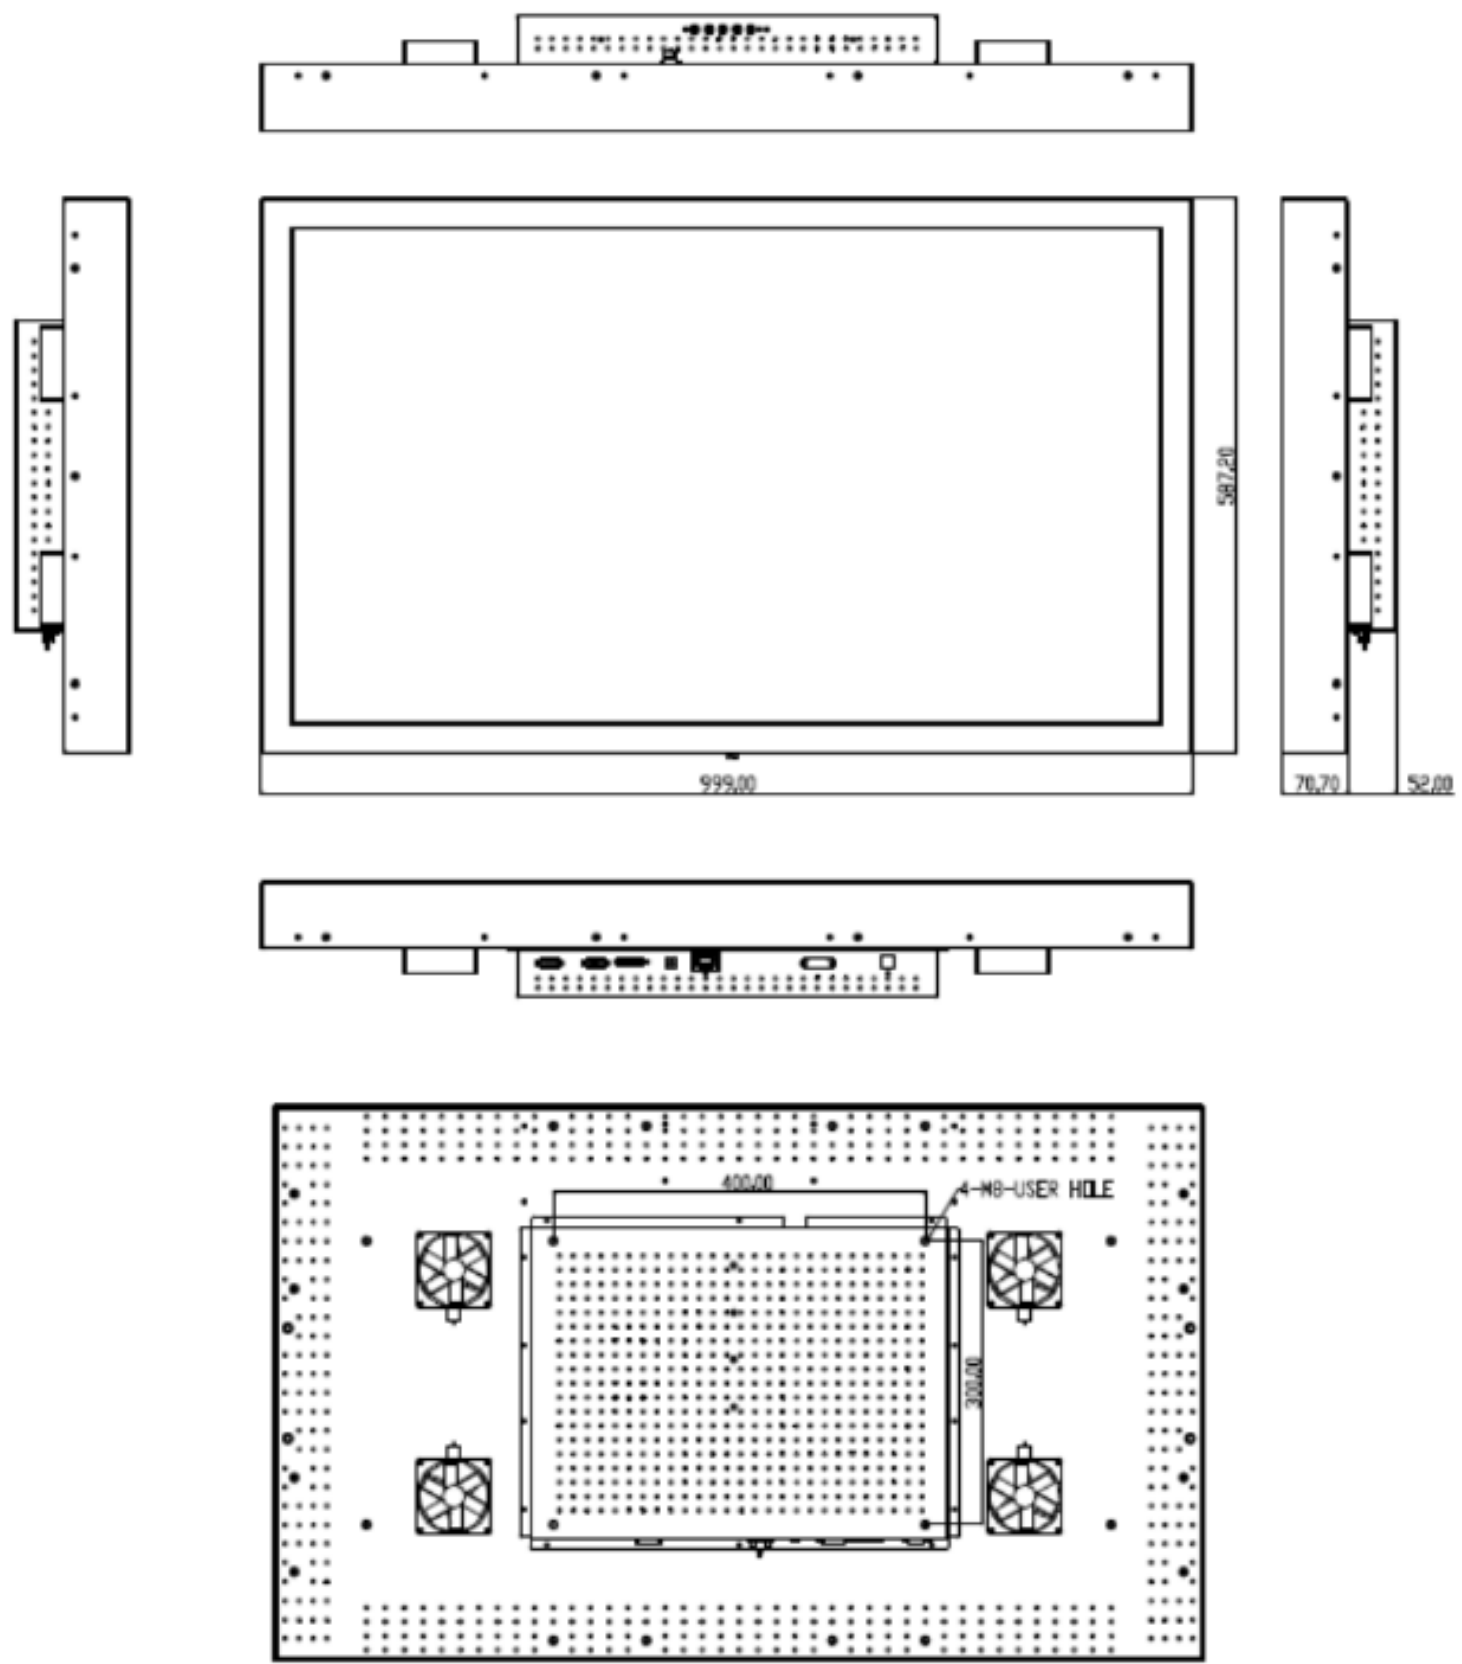

* All specification and photos are subject to change without notice.