



HOFY0NW10FD10

46" Open Frame TFT/LCD Monitor Full High Definition

Model	HOFY0NW10FD10	
Aspect Ratio	16:9	
Structure	Metal-cased Open Frame	
LCD Type	46 inch Active matrix TFT-LCD	
Active Area	1018.08(H) x 572.67(V)	
Monitor Dimensions	Width: 1083 mm Height: 680,8mm Depth: 96,9mm	
Max. Resolution	1920x1080	
Pixel pitch (mm)	0.53025 mm	
Display Color	16.7M	
Brightness	500cd/m2	
Response Time(Typ.)	6,5ms	
Viewing Angle (Typ.at CR>10)	Horizontal(left/right)	89°/89°
	Vertical(up/down)	89°/89°
Contrast Ratio(Typ.)	3500:1	
Video Input	VGA Input only	
Signal Input	H/V Separate Sync. (TTL)	
Video Signal Input	Mini D-Sub 15-pin VGA	
Environment	Operating Temp.	0~40°C
	Storage Temp.	-20~60°C
	Operating RH:	20%~85%
	Storage RH:	5%~85%
MTBF	60.000 Hours	
LCD Back light	60.000 Hours	
Weight (N.W/G.W)	TBC	
Power Consumption	TBC	
OSD Control	Function	Auto, H-pos, V-pos, Clock Phase, Auto color, Recall, Contrast, Brightness, Color Temp, Dimmer, Language, Format, Lamp, Sharpness
Regular Warranty	1year for controller; 1year for LCD	

Options

•Our monitors are also available with different brightness (LED, viewing angle and operation & storage temperature range). Please ask for specific model.

•Optional Touch solutions:

•Zytronic Projected Capacitive TouchScreen ZybridX that allows you to have a front Sacrificial Glass, protecting your TouchScreen & Monitor, up to 10 mm thickness.

•Optional Transflective TT enhancement


Ordering Information

•HOFY0NW100FD0 Basic Product

•HOFYTNW10FD10 Basic Product with Transflective enhancement

•HOFY0NW1X0FD0 Basic Product with TouchScreen ZybridX

•HOFYTNW1XFD10 Basic Product with Transflective enhancement and TouchScreen ZybridX

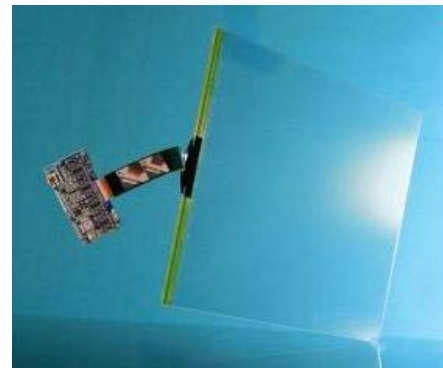

ZybridX TouchScreen & Controller (USB or RS232)

Mechanical Dimensions

