



HO1801D1000E0

10.4" Sonni Open Frame STD Extended Temperature Range

Model	HO1801D1000E0	
Aspect Ratio	5:4	
Structure	Metal-cased Open Frame	
LCD Type	10,4 " Active matrix TFT-LCD	
Active Area	10,4 " 211.2(H) x 158.4(V)	
Monitor Dimensions	Width: 241 Height: 182 Depth: 38	
Max. Resolution	800 x 600	
Pixel pitch (mm)	0.264(H)mm*0.264(V)mm	
Display Color	16.8M / 262K colors	
Brightness	230cd/m2	
Response Time(Typ.)	8ms	
Viewing Angle (Typ.at CR> 10)	Horizontal(left/right)	70°/70°
	Vertical(up/down)	55°/65°
Contrast Ratio(Typ.)	500:1	
Video Input	VGA Input only	
Video Signal Input	Mini D-Sub 15-pin VGA	
Power Supply	Type: External brick Input: 100-240 VAC, 50-60 Hz Output: 12 volts	
Environment	Operating Temp.	-20~70°C
	Storage Temp.	-30~80°C
	Operating RH:	5%~95%
	Storage RH:	5%~95%
MTBF	30.000 Hours	
LCD Back light Life(Typ.)	30.000 Hours	
OSD Control	Buttons	on/off, up, down, left, right
	Function	Contrast, brightness, Phase, Clock, Color,
Regular Warranty	1 year for controller; 1 year for	
Mount Interface	VESA standard 75mm and	
Certification	CE	

Options

•Our monitors are also available with different brightness (LED, viewing angle and operation & storage temperature range). Please ask for specific model.

•Optional Touch solutions:

•Zytronic Projected Capacitive TouchScreen ZybridX that allows you to have a front Sacrificial Glass, protecting your TouchScreen & Monitor, up to 10 mm thickness. (Zytronic Certified and Approved Integrators)

•Optional Transflective TT enhancement

Ordering Information

• HO1801D1000E0 Basic Product


• HO18T1D1000E0 Basic Product with Transflective enhancement

• HO1801D1X00E0 Basic Product with TouchScreen ZybridX (Zytronic Certified and Approved Integrators)

• HO18T1D1X00E0 Basic Product with Transflective enhancement and TouchScreen ZybridX (Zytronic Certified and Approved Integrators)

•HO18T1D1006E0 Basic Product with Transflective enhancement and Sacrificial Glass 6MM

•HO18T1D1X06E0 Basic Product with Transflective enhancement, TouchScreen Zybridx and Sacrificial Glass 6MM (Zytronic Certified and Approved Integrators)

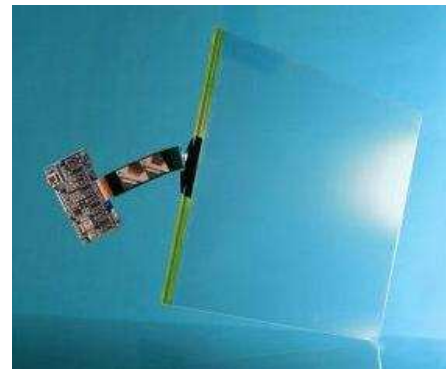

ZybridX TouchScreen & Controller (USB or RS232)

Front View



Back View

