



HO1801D1000EC

10.4" Sonni Open Frame STD Extended Temperature Range – Cooling Kit

Model	HO1801D1000E0	
Aspect Ratio	5:4	
Structure	Metal-cased Open Frame	
LCD Type	10,4 " Active matrix TFT-LCD	
Active Area	10,4 " 211.2(H) x 158.4(V)	
Monitor Dimensions	Width: 250,5 Height: 182 Depth: 46	
Max. Resolution	800 x 600	
Pixel pitch (mm)	0.264(H)mm*0.264(V)mm	
Display Color	16.8M / 262K colors	
Brightness	230cd/m2	
Response Time(Typ.)	8ms	
Viewing Angle (Typ.at CR> 10)	Horizontal(left/right)	70°/70°
	Vertical(up/down)	55°/65°
Contrast Ratio(Typ.)	500:1	
Video Input	VGA Input only	
Video Signal Input	Mini D-Sub 15-pin VGA	
Power Supply	Type: External brick Input: 100-240 VAC, 50-60 Hz Output: 12 volts	
Environment	Operating Temp.	-20~70°C
	Storage Temp.	-30~80°C
	Operating RH:	5%~95%
	Storage RH:	5%~95%
MTBF	30.000 Hours	
LCD Back light Life(Typ.)	30.000 Hours	
OSD Control	Buttons	on/off, up, down, left, right
	Function	Contrast, brightness, Phase, Clock, Color,
Regular Warranty	1 year for controller; 1 year for	
Mount Interface	VESA standard 75mm and	
Certification	CE	

Options

•Our monitors are also available with different brightness (LED, viewing angle and operation & storage temperature range). Please ask for specific model.


•Optional Touch solutions:

•Zytronic Projected Capacitive TouchScreen ZybridX that allows you to have a front Sacrificial Glass, protecting your TouchScreen & Monitor, up to 10 mm thickness.

•Optional Transflective TT enhancement

Ordering Information

- HO1801D1000EC Basic Product
- HO18T1D1000EC Basic Product with Transflective enhancement
- HO1801D1X00EC Basic Product with TouchScreen ZybridX
- HO18T1D1X00EC Basic Product with Transflective enhancement and TouchScreen ZybridX

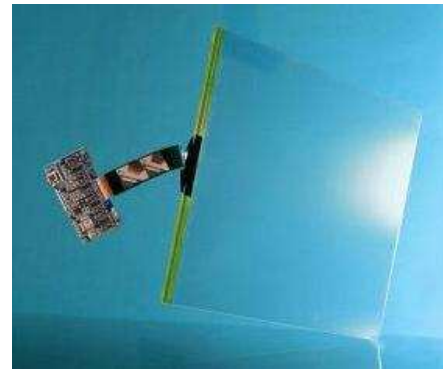

ZybridX TouchScreen & Controller (USB or RS232)

Front View



Back View

